



ELKHALIL


one name supplies it all


**FIT
FIT
FIT
FIT**

**FURNITURE FITTINGS
SYSTEMS**

WWW.ELKHALIL-WOOD.COM

Concealed Hinges

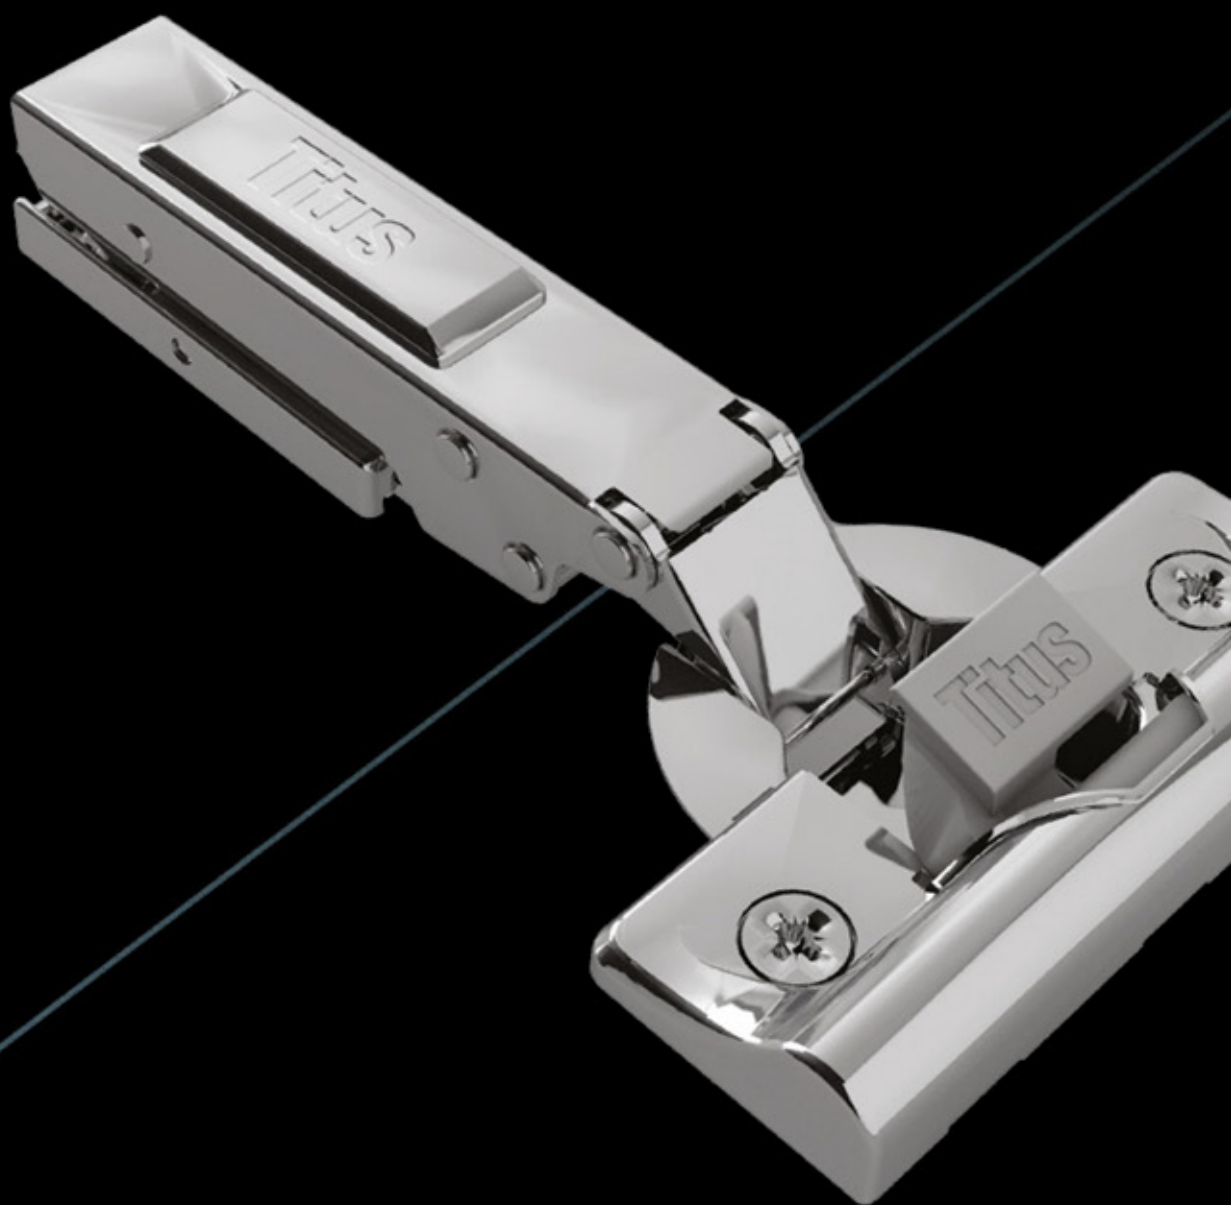

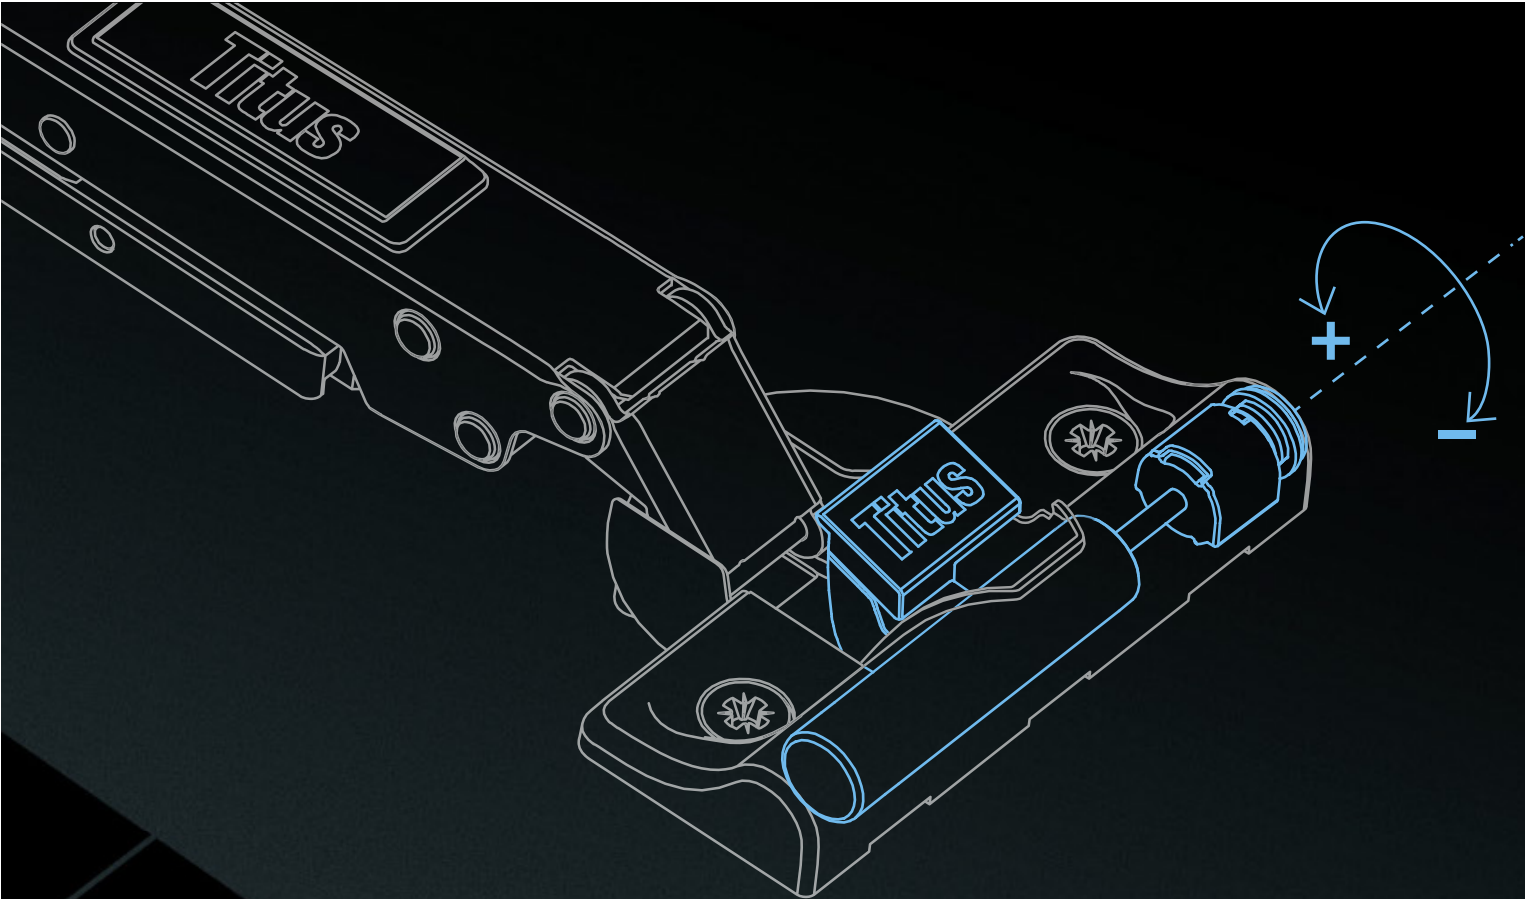

Confident Close

The hinge is designed to provide consumer preferred way of soft closing action.

- Fast closing
- Late start of deceleration action
- Quiet landing with SoftTouch

Based on independent consumer researches.

One-for-All

- Damping on the hinge cup
- Damper, positioned transversal to the hinge allows for easy introduction of various hinge versions
- Damped and non-damped version on one mounting plate platform

Adjustable Damping


Flexibility to tune performance to wide range of applications

- Consistent performance over a wide range of doors of different sizes and weights
- Easy accessible button for intuitive and quick adjustment

Titus Damper Inside

- Efficient damping at any closing speed
- Reliable closing
- Damping force consistency

T-TYPE-I 110

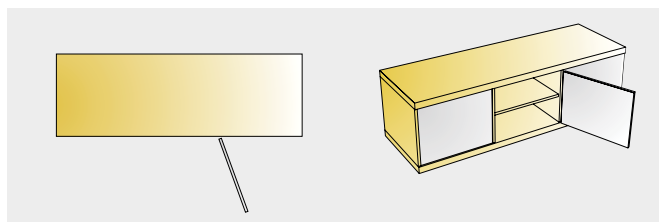



- ▶ Opening angle 110°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on

Drilling Pattern		Full Overlay	Half Overlay	inset
------------------	--	--------------	--------------	-------


With integrated Silent System.

Mounting Option	Mounting hole Ø×T mm	Full overlay 150 Pcs.	Half overlay 150 Pcs.	Inset 150 Pcs.
screw on	-	100TK143	100TK144	100TK145
Pre-mounted 10.5mm expanding dowels	ø 10.5 x 5	100TK181	100TK182	100TK183


Damping adjustment Door adjustment



Side adjustment
+3/-1mm




Height adjustment
+2/-2mm



Depth adjustment
+4/-1mm


T-TYPE- 110

INTEGRATED SILENT SYSTEM

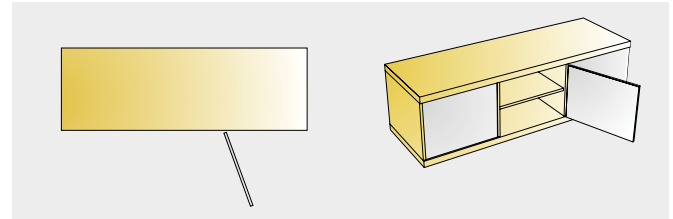


- ▶ Opening angle 110°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on


Drilling Pattern




Full Overlay



Half Overlay




inset




With integrated Silent System.

Mounting Option	Mounting hole Ø×T mm	Full overlay 150 Pcs.	Half overlay 150 Pcs.	Inset 150 Pcs.
screw on	-	100TK140	100TK141	100TK142
Pre-mounted 10.5mm expanding dowels	Ø 10.5 x 5	100TK180	100TK181	100TK182


Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm




Height
adjustment
+2/-2mm




Depth
adjustment
+4/-1mm

T-TYPE- I-95

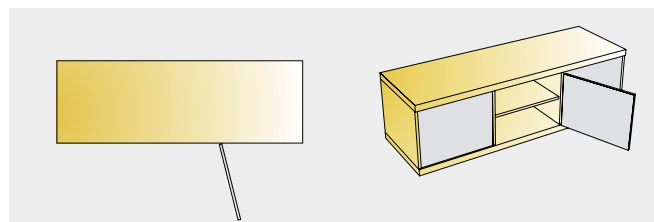


- ▶ Opening angle 95°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on


Drilling Pattern




Full Overlay



Half Overlay




inset




With integrated Silent System.

Mounting Option	Mounting hole Ø×T mm	Full overlay 150 Pcs.	Half overlay 150 Pcs.	Inset 150 Pcs.
screw on	-	100TK189	100TK190	100TK176


Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm




Height
adjustment
+2/-2mm



Depth
adjustment
+4/-1mm


T-TYPE 95

INTEGRATED SILENT SYSTEM

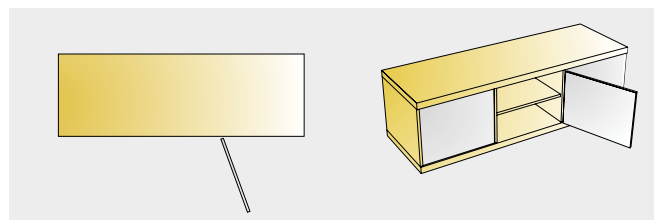


- ▶ Opening angle 95°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on


Drilling Pattern




Full Overlay



Half Overlay




inset




With integrated Silent System.

Mounting Option	Mounting hole Ø×T mm	Full overlay 150 Pcs.	Half overlay 150 Pcs.	Inset 150 Pcs.
screw on	-	100TK187	100TK188	100TK175


Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm





Height
adjustment
+2/-2mm






Depth
adjustment
+4/-1mm

T-TYPE 170

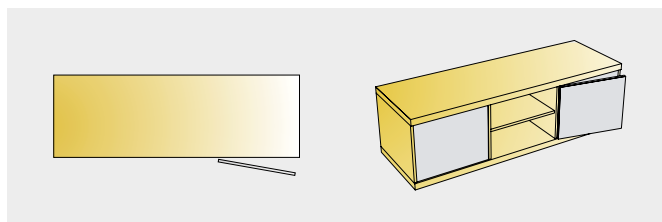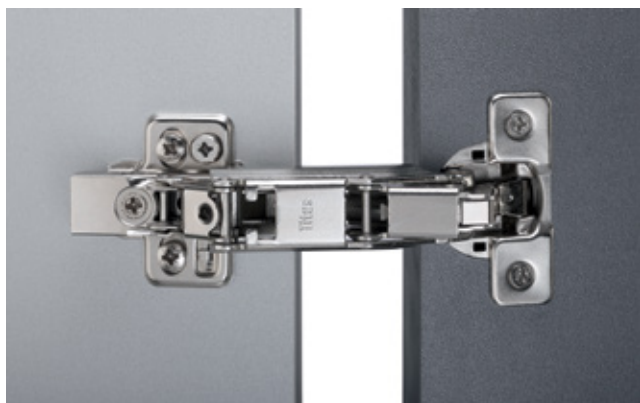


- ▶ Opening angle 170°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on

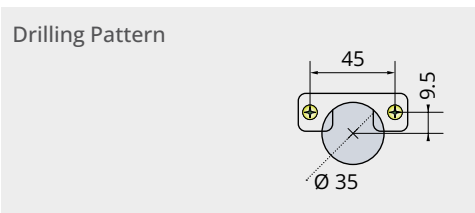


Mounting Option	Mounting hole Ø×T mm	Full overlay 50 Pcs.	Half overlay 50 Pcs.
screw on	-	100TK148	100TK149



Damping adjustment Door adjustment

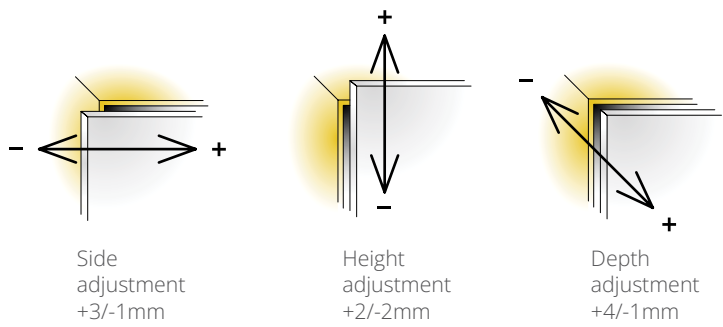

T-TYPE 110/45°

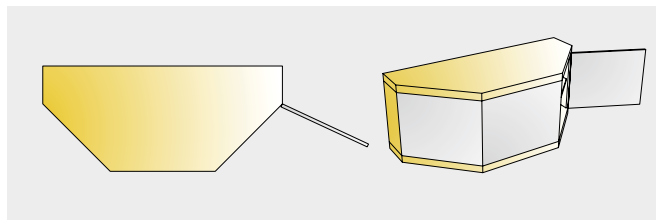


- ▶ Opening angle 110°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on

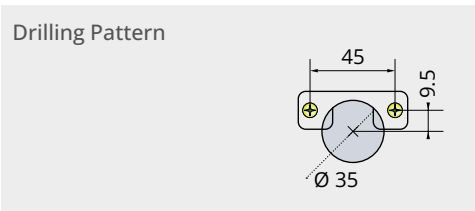


Mounting Option	Mounting hole Ø×T mm	Full overlay 100 Pcs.
screw on	-	100TK146

Damping adjustment Door adjustment

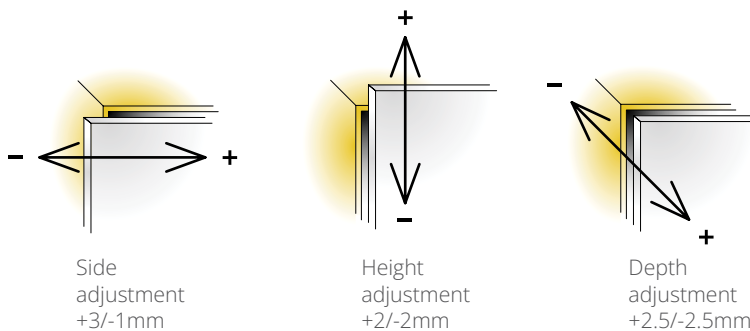


T-TYPE 110/90°

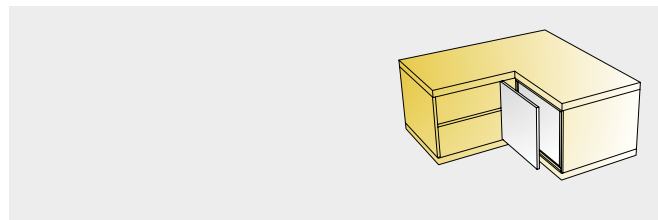


- ▶ Opening angle 110°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on

Drilling Pattern





inset




Mounting Option	Mounting hole Ø×T mm	inset 100Pcs.
screw on	-	100TK147

Damping adjustment


Door adjustment



Side
adjustment
+3/-1mm




Height
adjustment
+2/-2mm




Depth
adjustment
+4/-1mm

S-TYPE FOR PIE-CUT CORNER CABINET

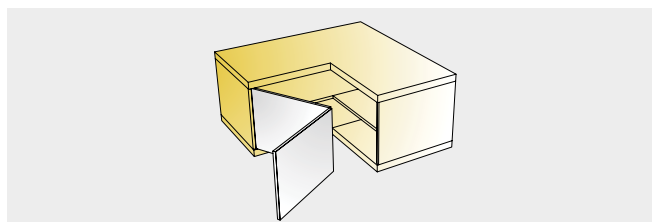


- ▶ Opening angle 110°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 11 mm
- ▶ Hinge on plate mounting system snap-on

Drilling Pattern



Full Overlay



Mounting Option

Mounting hole
Ø×T mm

Full overlay
100 Pcs.


screw on

-


100TK191

Damping adjustment


Door adjustment



Side
adjustment
+3/-1mm




Height
adjustment
+2/-2mm



Depth
adjustment
+5/-1.5mm


TERABLACK T-TYPE 110

INTEGRATED SILENT SYSTEM

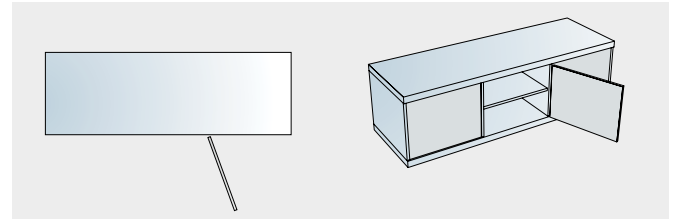


- ▶ Opening angle 110°
- ▶ Drilling diameter for hinge cup 35 mm
- ▶ Drilling depth 12 mm
- ▶ Hinge on plate mounting system 3 Way snap-on


Drilling Pattern




Full Overlay



Half Overlay




inset




With integrated Silent System.

Mounting Option	Mounting hole Ø×T mm	Full overlay 150 Pcs.	Half overlay 150 Pcs.	Inset 150 Pcs.
Pre-mounted 10.5mm expanding dowels	Ø 10.5 x 5	100TK177	100TK186	100TK178


Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm



Depth
adjustment
+4/-1mm

